

IPVIEW RESIDENT VIDEO ENTRY GUIDE

CREATING SAFER LIVING ENVIRONMENTS™

TECHNICAL COMPLIANCE:

- ✓ SECURED BY DESIGN ACCREDITED,
- ✓ EQUALITY ACT 2010 (DDA).

**BATI
CONNECT**

CLOUD

24/7/365

www.baticonnect.com



**Visitor call-logging
security feature**
to comply fully with Secured by Design

IPVIEW video door entry panel

FEATURES

- Anti-vandal BS316 stainless steel.
- Flush flanged, surface or, hooded surface for post mounting.
- Illuminated digital display.
- Large 15.6mm diameter braille embossed keypad buttons.
- Large 8mm high blue illuminated digits and characters.
- Voice output messages.
- Visual icon messages.
- Visual display information messages.



CALLING PROCEDURE

Visitor enters flat number onto keypad and presses Bell button  for immediate call.

Or

Visitor selects using up/down arrows  and presses Bell button .

PROXIMITY KEYFOB READER FOR RESIDENTS

Visitor call-logging security feature to comply fully with Secured by Design.

IPVIEW video door entry panel

TFT COLOUR SCREEN

- Large colour screen
- Large touch screen also available
- Easy menus
- Customisable, display building specific information


ANTI-CLONE PROTECTION



**ANTI CLONE
GUARANTEE**

VOICE OUTPUT MESSAGES

- Voice prompts to aid visitors

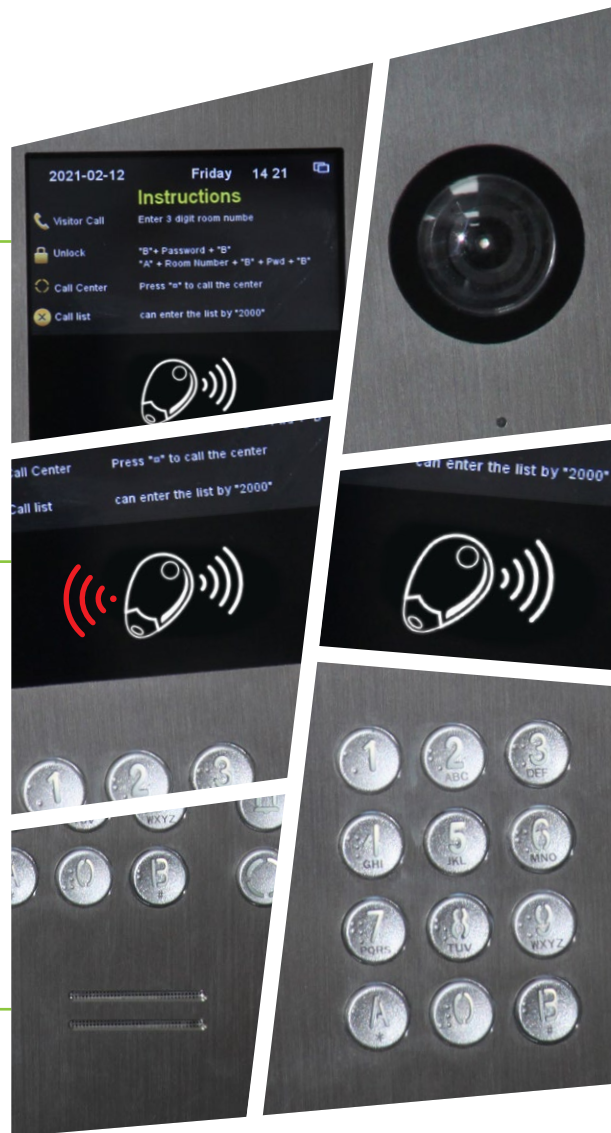

TRADES, FACILITIES & TIME CONTROL CAPABILITIES

HD WIDE ANGLE CAMERA

- LED illumination for night usage
- Facial recognition
- QR code scanning

INTEGRAL PROXIMITY ACCESS CONTROL READER

VISITOR & RESIDENT FLOOR SPECIFIC LIFT ACCESS CONTROL

BRAILLE KEYPAD


- Large 15.6mm dia raised buttons
- Large illuminated 8mm digits
- Keypad code for facilities
- IK09 vandal protection

ANTI-VANDAL

- BS316 stainless steel
- IK09 vandal protection

IPVIEW Smart Receiver

With integral hearing aid induction loop for Equality Act 2010 (DDA) compliance.

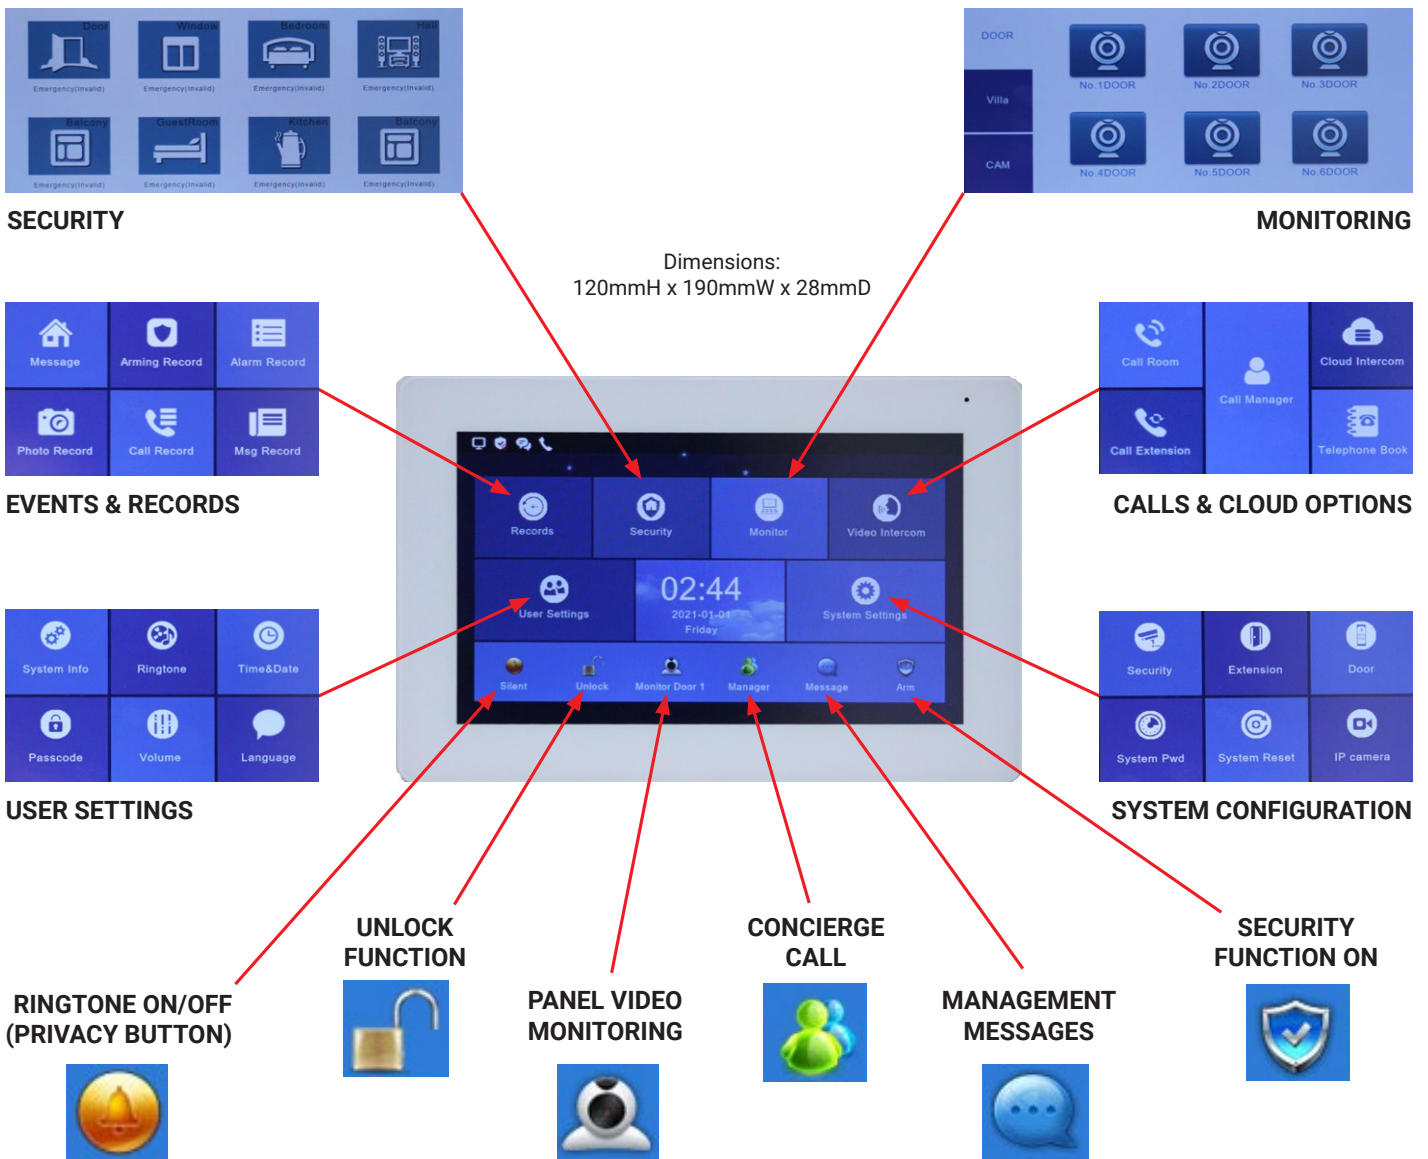

To answer a call from the IPVIEW visitor panel:

1. The video monitor will ring and display picture of your visitor.
2. Press **ACCEPT** on the video monitor and talk to your visitor.
3. Press **UNLOCK** on the video monitor if you want to open the door for the visitor.
4. **Then always press HANG UP.**

If you do not want to let the visitor in just press **HANG UP.**


To enable the button in the Lift for your floor (if applicable):

Do everything as explained above... **remember you must always end the call by pressing HANG UP.**

Now if you press **UNLOCK** on the video monitor the lift floor button will be enabled.


You can enable the Lift Floor Button at any time by pressing the **UNLOCK** button but only when the video monitor is not on a call with the visitor panel.

System configuration

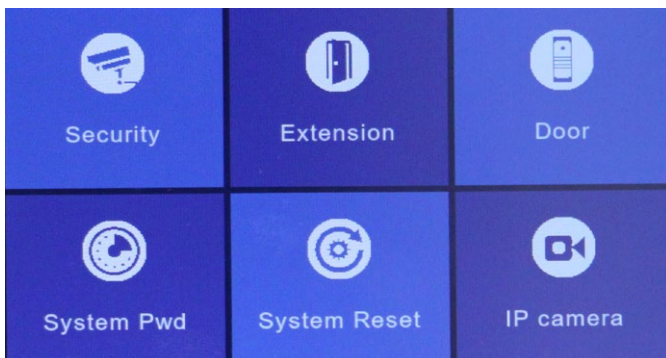

Admin / Maintenance can adjust all parameters and settings required to connect to the IP System.

Monitoring

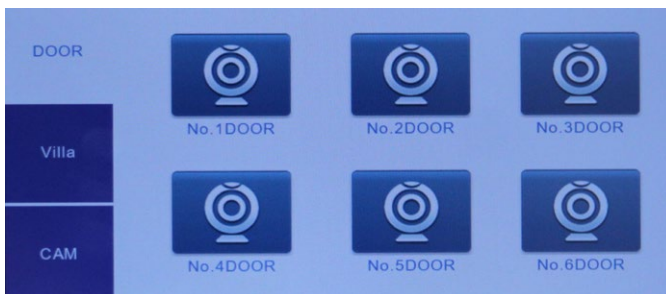


Panels & IP Cameras – monitoring all Panels and IP Cameras setup to the system from IPVIEW Monitor Interface. Can trigger Unlock function and take real time snapshot saved into the internal or external (MicroSD card)

Security




Security Interface – 8 security zones including Security Zone Location, Arming Type, Arming Status. One click to Arm or Disarm all 8 security zones.

User settings

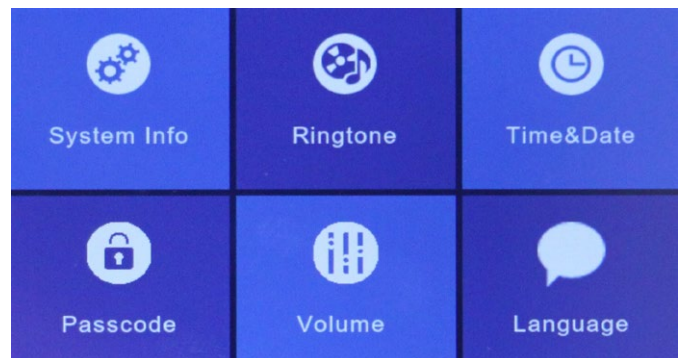

- System Info - details about connection type, functions to manage SD card.
- Ringtone Settings - setup ringtones for the handset.
- Time and Date setup and change display format.
- Passcode Settings - personalize User Access Code.
- Volume Settings - adjust the volume level for Ring and Talk functions.
- Turn On/Off key tone when using touch screen.
- Language Settings - select the preferred Language.
- Screen Brightness - adjust the brightness.
- Wallpaper - user can select preferred wallpaper from SD card.
- Screen Saver - supports 4 types of standby modes: black screensaver, digital time screensaver, clock screensaver and picture screensaver.


Calls and cloud options

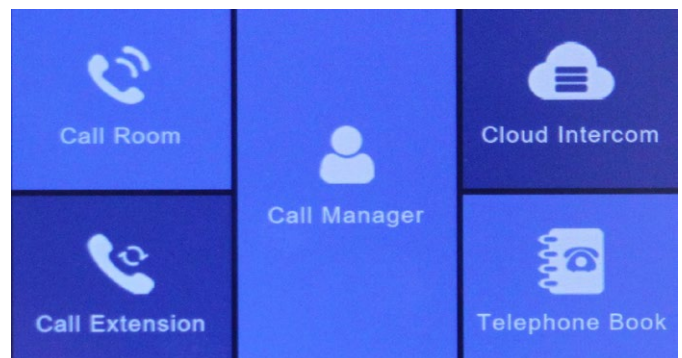


- Call Flat - system can call any other user connected to the block Door Entry System (this option can be enabled or disabled).
- Internal Call - the function supports intercom calls between more than 1 handset setup in the dwelling.
- Cloud Intercom - if Cloud Intercom is setup (see user manual) calling from the door panel will generate a notification to the smart phone. Audio/Video channel will be routed to the phone and indoor monitor. With this option you can have a “family call” as can setup more than 1 device. System will recognize the 1st device answering opens the link and will terminate the call to others. This function requires Wi-Fi connection in the dwelling.

How to connect your Smartphone to IPVIEW (Tuya App)


Select "Video Intercom" from the menu. Select "Wi-Fi Connection" **1**.
Once you have found your Wi-Fi network press Connect and enter your Wi-Fi password.

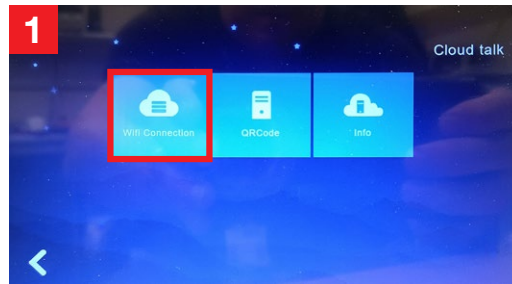


When the Status shows Connected, press back to exit from this option **2**.

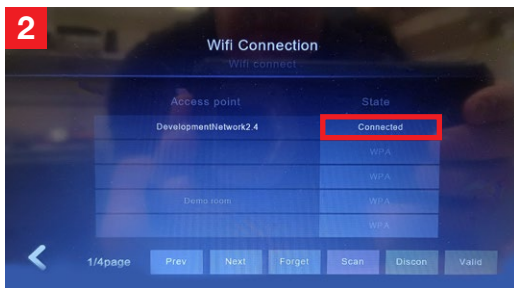


After successful connection, select the option "QRCode". You will see a QR Code ready to be paired with your smartphone **3**.

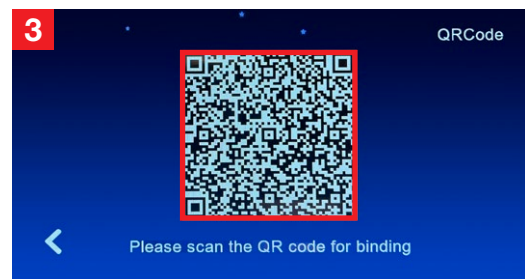


You have to first have a TUYA account activated. Select the "+" in the top right corner **4**.

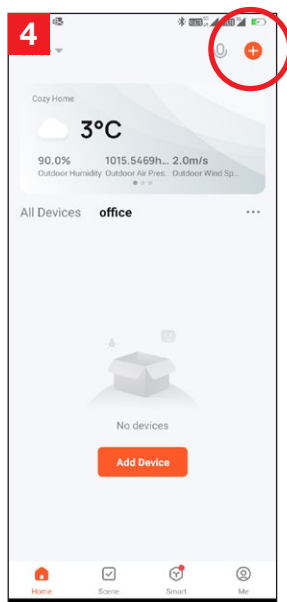

Then from pop-up menu, select "Scan" **5**.

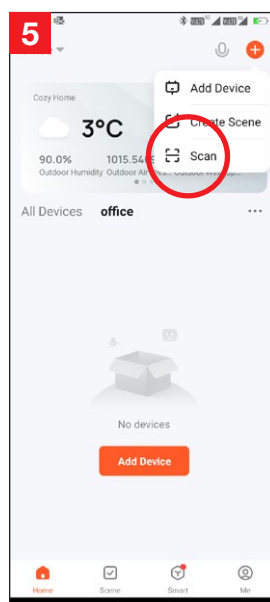


Point the camera of your smartphone at the QR Code. The system will automatically progress the binding process **6**.

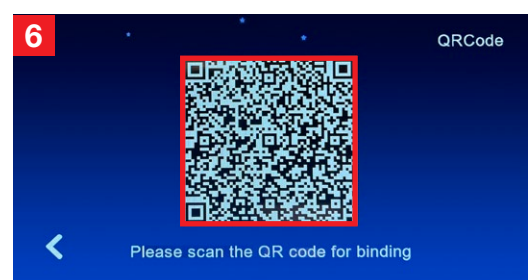


How to add additional Smart Devices to your home


1. Click 'Me' bottom left.
2. Click 'Home Management'.
3. Select your Home.
4. Click 'Add member'.
5. Click 'App account' and fill in the required details of the additional devices.

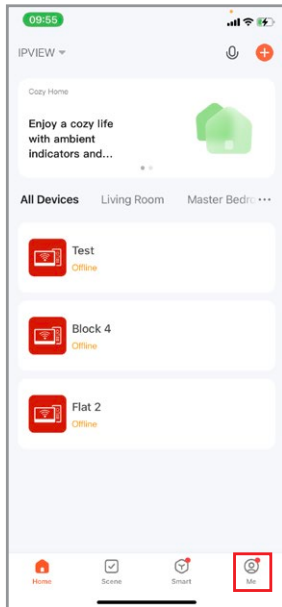


1

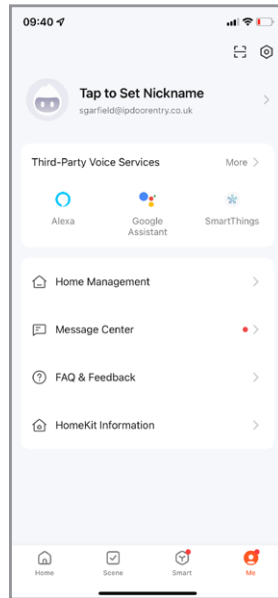


2

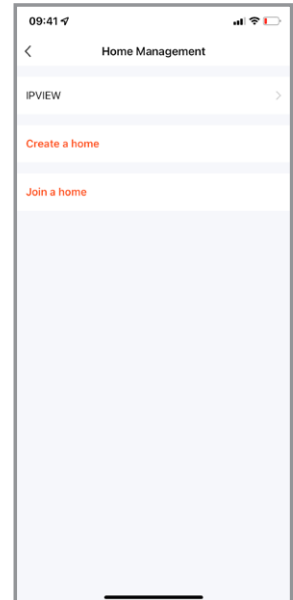

3

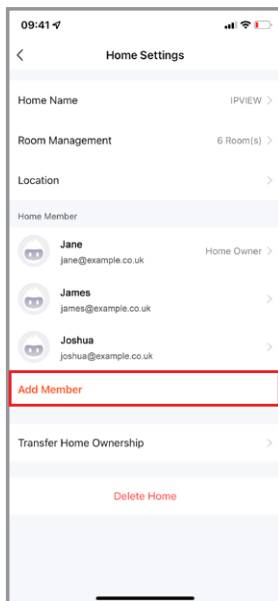

4

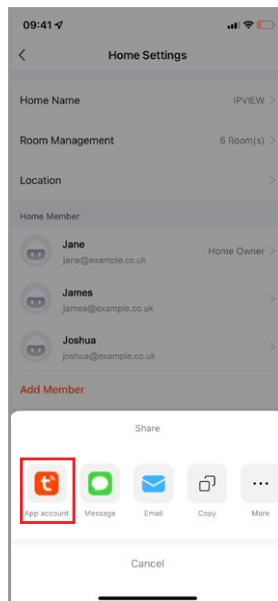

5



Maintenance: 08700 33 33 88
maintenance@nacd.co.uk

Fobs: 0843 497 7979
fobs@nacd.co.uk

www.nacd.co.uk
f in nacdltd

Unit 8, Heron Business Park, Eastman Way,
Hemel Hempstead, Hertfordshire, HP2 7FW

