


# IPGUARD ZAN1055 AERIAL WITH FIXING BRACKET


## Option 1

GSM Aerial connected directly to IPGUARD.

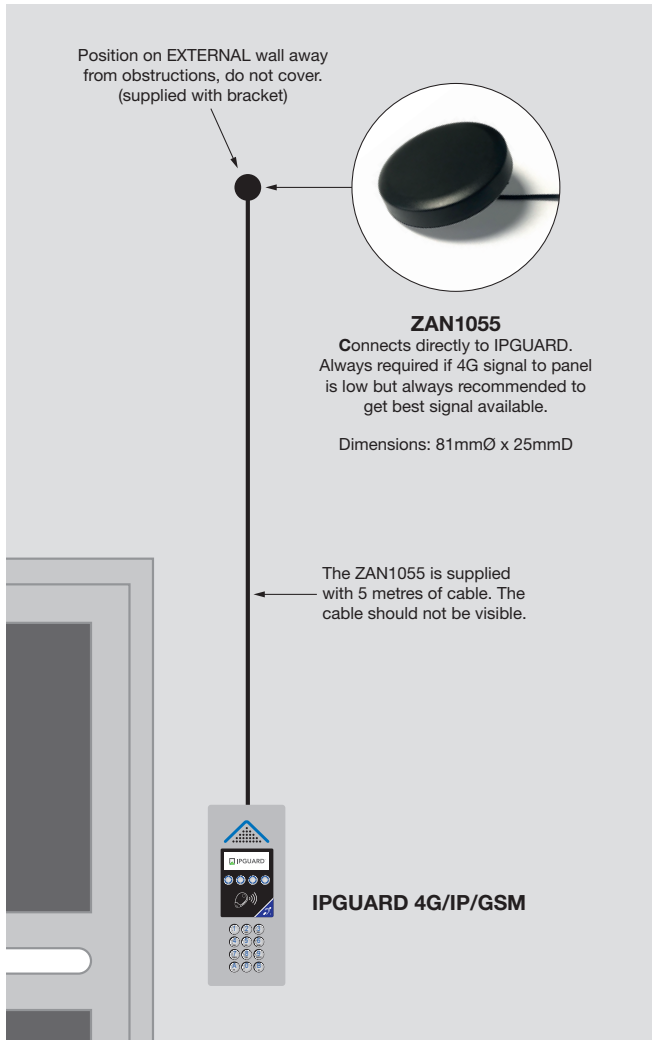

## Option 2

GSM Aerial located on roof of building.

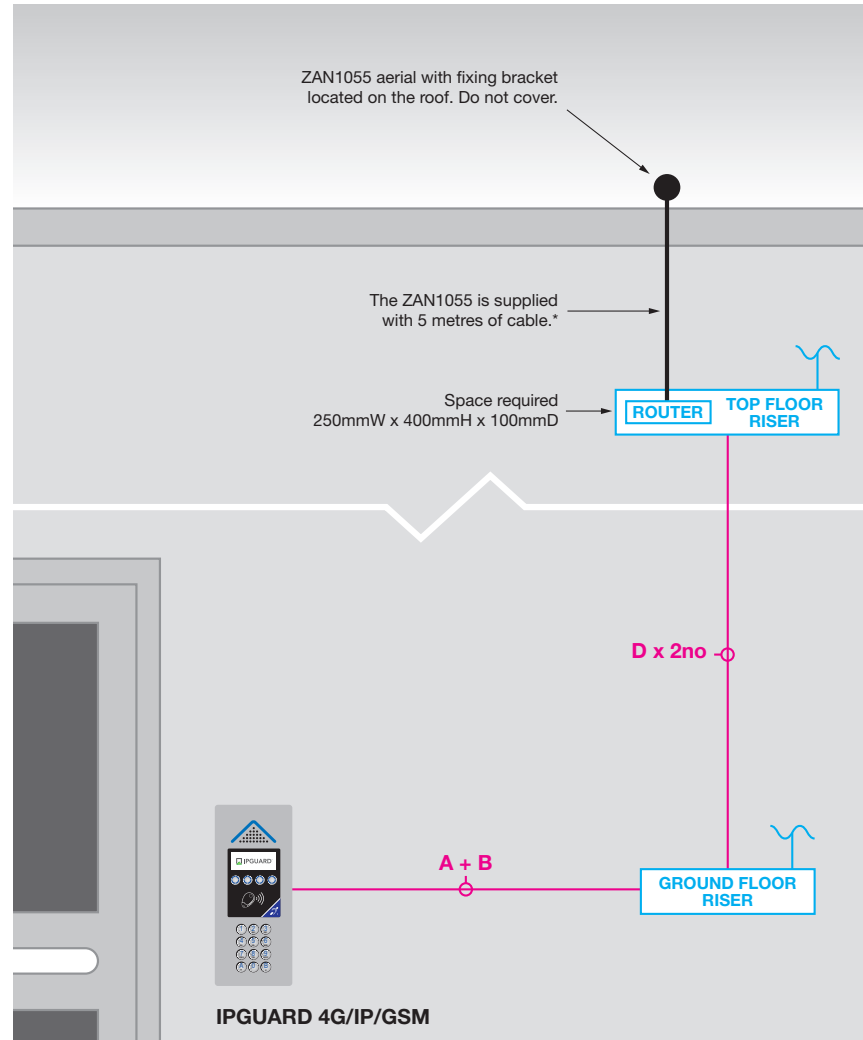

## LEGEND

- A** Class E (CAT6) U/UTP x 4no + Earth 1.5mm<sup>2</sup> (6491X)
- B** 3-core 1.5mm<sup>2</sup> flex cable (3183Y)
- D** Class E (CAT6) U/UTP

**IMPORTANT** Please make sure you also have a copy of the NACD Full Legend document.

\* The ZAN1055 aerial is also available with thicker cables as follows:

ZCAB54-M with 10 metres of 50 Ohm low loss communication coax cable.

ZCAB53-M with 15 metres of 50 Ohm low loss communication coax cable.

ZCAB52-M with 20 metres of 50 Ohm low loss communication coax cable.