




T N° 071/1
IPVIEW + GERDA

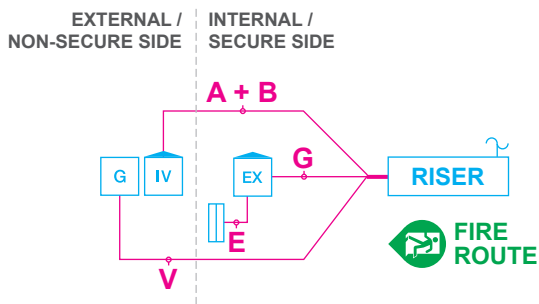


T N° 071/1A
IPVIEW + DC + GERDA

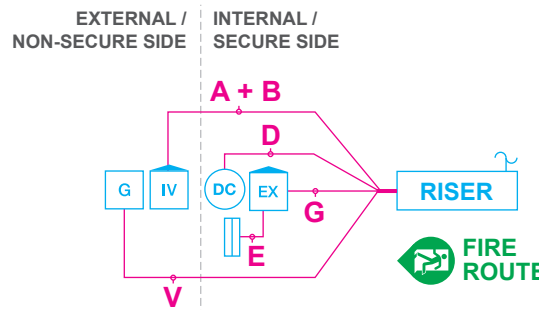





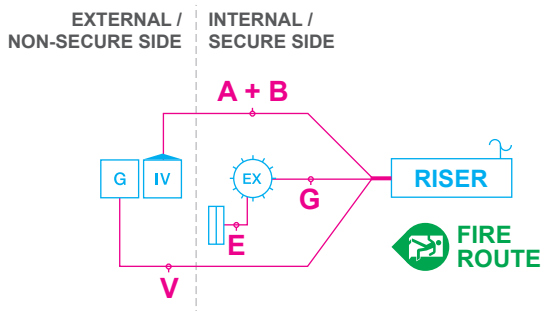


T N° 071/2
IPVIEW with EM24EX + GERDA

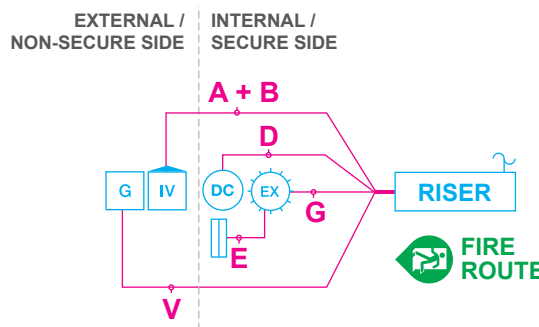

T No. 071/2A
IPVIEW with EM24EX + DC + GERDA




LEGEND

-  IPVIEW video door entry system (IP based). L68
-  12VDC fail safe electric release or electro-magnet L08
-  Double Pole (DP) momentary NO/NC door release button & Green Emergency Breakglass L06
-  EM24EX stainless steel normal exit + self-resetting latching emergency exit system L41
-  Door contact. L19
-  Fireman switch. L16
-  Gerda Access Control Box (ACB) L67


- A** Class E (CAT6) U/UTP x 4no + Earth 1.5mm² (6491X)
- B** 3-core 1.5mm² flex cable (3183Y)
- D** Class E (CAT6) U/UTP
- E** Lock circuit cable ref. 4 x 1 YY/LSZH per lock (4-core, 1mm²/core)
- G** Lock circuit cable ref. 4 x 1 YY/LSZH per lock (4-core, 1mm²/core) + Class E (CAT6) U/UTP x 1no
- V** FP200 (BS5839-1 / Class 1 CU compliant) 1mm²/core cable, 3-core + 1-core Earth. (Red sheaf, brown, grey, black + green/yellow cores)

IMPORTANT Please make sure you also have a copy of the NACD Full Legend document.


T N° 070/1
IPVIEW + Fireman Switch

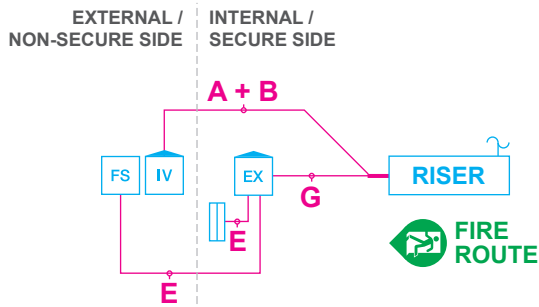


T N° 070/1A
IPVIEW + DC + Fireman Switch

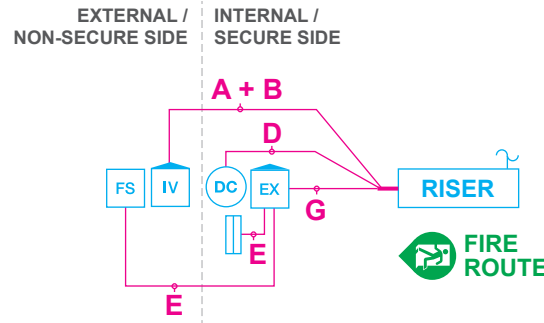





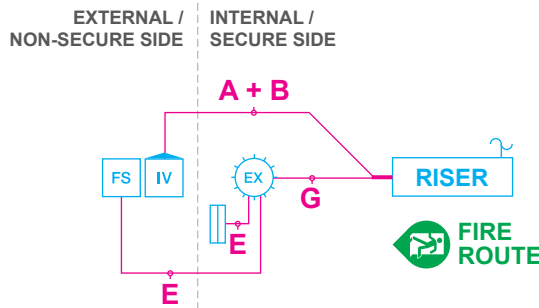


T N° 070/2
IPVIEW with EM24EX + Fireman Switch

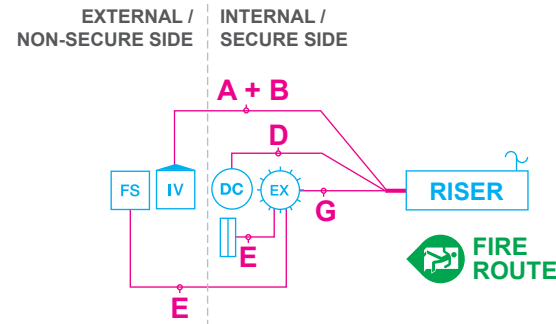

T N° 070/2A
IPVIEW with EM24EX + DC + Fireman Switch



LEGEND

-  IPVIEW video door entry system (IP based). L68
-  12VDC fail safe electric release or electro-magnet L08
-  Double Pole (DP) momentary NO/NC door release button & Green Emergency Breakglass L06
-  EM24EX stainless steel normal exit + self-resetting latching emergency exit system L41
-  Door contact. L19
-  Fireman switch. L16
-  Gerda Access Control Box (ACB) L67

- A** Class E (CAT6) U/UTP x 4no + Earth 1.5mm² (6491X)
- B** 3-core 1.5mm² flex cable (3183Y)
- D** Class E (CAT6) U/UTP
- E** Lock circuit cable ref. 4 x 1 YY/LSZH per lock (4-core, 1mm²/core)
- G** Lock circuit cable ref. 4 x 1 YY/LSZH per lock (4-core, 1mm²/core) + Class E (CAT6) U/UTP x 1no
- V** FP200 (BS5839-1 / Class 1 CU compliant) 1mm²/core cable, 3-core + 1-core Earth. (Red sheaf, brown, grey, black + green/yellow cores)

IMPORTANT Please make sure you also have a copy of the NACD Full Legend document.