


PX11-1GF Anti-Vandal Proximity Reader, Flush

Q Nº. 425RS

PX11-1GF





BATICONNECT® CLOUD MIFARE Technology Proximity Reader

Internal & External (under cover / not exposed to rain)



24/7/365 REAL-TIME CLOUD MANAGEMENT baticonnect.com





NOTES

Standard 1G flush embedding box 45mmD.

Flush BS316 grade s.steel anti-vandal proximity reader PX11-1GF.



Operate in conjunction with EVE196-X3-RS door control units, BATICONNECT® Cloud.



PX11-1GS Anti-Vandal Proximity Reader, Surface

Q Nº. 426RS

PX11-1GS SURFACE





- 50 mm

FRONT VIEW

SIDE VIEW

BATICONNECT® CLOUD MIFARE Technology Proximity Reader

Externally rated.







NOTES

Surface BS316 grade s.steel anti-vandal proximity reader PX11-1GS.




Operate in conjunction with EVE196-X3-RS door control units, BATICONNECT® Cloud.




PX11-125F Externally Rated Anti-Vandal Proximity Reader, Flush Flanged

Q Nº. 427RS

PX11-125F

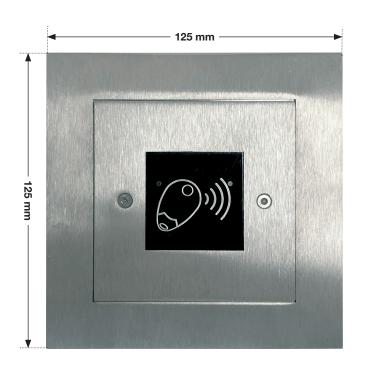

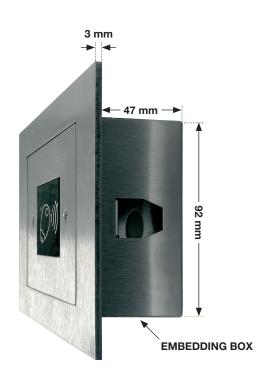

BATICONNECT® CLOUD MIFARE Technology Proximity Reader



24/7/365 REAL-TIME CLOUD MANAGEMENT baticonnect.com



Dimensions (mm): Backbox 92H x 92W x 47D Facia 125H X 125W



ANTI-CLONE GUARANTEE
ONLY FOR NORALSY BATICONNECT & IPGUARD SYSTEMS

NOTES

Flush flanged BS316 grade s.steel anti-vandal externally rated proximity reader.




Operate in conjunction with EVE196-X3-RS door control units, BATICONNECT® CLOUD.




PX11-MK1G-BSS Internal Proximity Reader, Brushed Stainless Colour Finish

Q Nº. 410RS

PX11-MK1G-BSS





BATICONNECT® CLOUD MIFARE Technology Proximity Reader brushed stainless colour finish

Internal flush only



24/7/365 REAL-TIME CLOUD MANAGEMENT baticonnect.com





NOTES

- 1. MK Aspect range plates (selection of).
- 2. Standard 1G flush embedding box 45mmD.

Flush internal proximity reader, brushed stainless colour finish PX11-MK1G-BSS.



Operate in conjunction with EVE196-X3-RS door control units, BATICONNECT® Cloud.