

IPVIEW® Visitor Door Entry

Full IP / PoE Video Panel

Calls Video Monitors & Smart Phones.

Full IP / PoE connection

IPVIEW IP Video Door Entry & Access Control System



IPVIEW-F

Flush Flanged BS316 S.Steel
Backbox: 360mmH x 135mmW x 70mmD
Facia and flange: 410mmH x 185mmW



IPVIEW-HS

Hooded Surface BS316 S.Steel
374mmH x 149mmW x 63mmDB x 93mmDT

KEY FEATURES...

- High definition camera
- LCD colour screen
- Anti-vandal proximity reader, illuminated
- Remotely programmable proximity reader
- Equality Act 2010 compliant (DDA)
- No IP controller required
- Robust stainless steel facia
- Concierge enabled
- Mobile access via Smart App
- Multi-block integration
- Optional lift integration module
- Facial recognition (coming soon)
- QR code scanning (coming soon)



24/7/365


www.baticonnect.com

SPECIFICATIONS	IPVIEW
MECHANICAL CHARACTERISTICS	
Backbox dimensions	360mmH x 135mmW x 70mmD
Facia and flange dimensions	410mmH x 185mmW
Hooded surface dimensions	374mmH x 149mmW x 63mmDB x 93mmDT
Material, Finish	Stainless steel BS316, brushed
Protection rating	IP67 / IK09 / UL94V0

Feature packed

TFT COLOUR SCREEN

- Large colour screen
- Large touch screen also available
- Easy menus
- Customisable, display building specific information

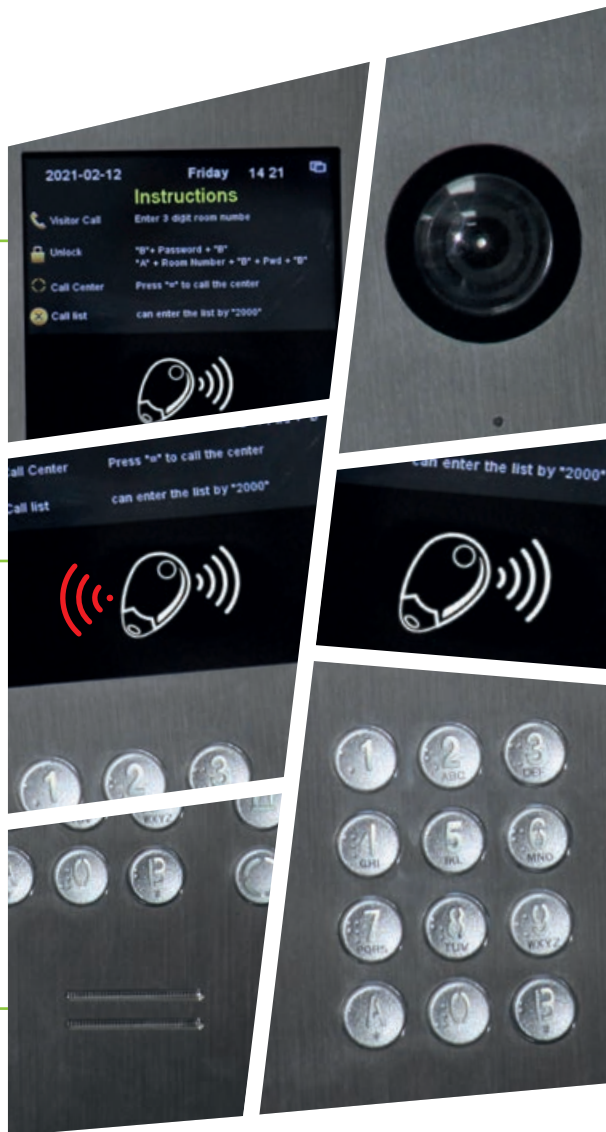

TRADES, FACILITIES & TIME CONTROL CAPABILITIES

HD WIDE ANGLE CAMERA

- LED illumination for night usage
- Facial recognition (coming soon)
- QR code scanning (coming soon)

INTEGRAL PROXIMITY ACCESS CONTROL READER

VISITOR & RESIDENT FLOOR SPECIFIC LIFT ACCESS CONTROL

BRaille KEYPAD

- Large 15.6mm dia raised buttons
- Large illuminated 8mm digits
- Keypad code for facilities
- IK09 vandal protection

ANTI-VANDAL

- BS316 stainless steel
- IK09 vandal protection

ANTI-CLONE PROTECTION






ANTI CLONE GUARANTEE

VOICE OUTPUT MESSAGES

- Voice prompts to aid visitors

High specification camera

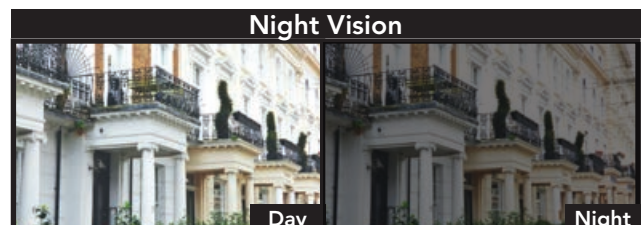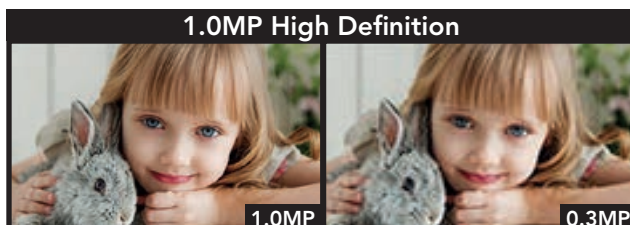

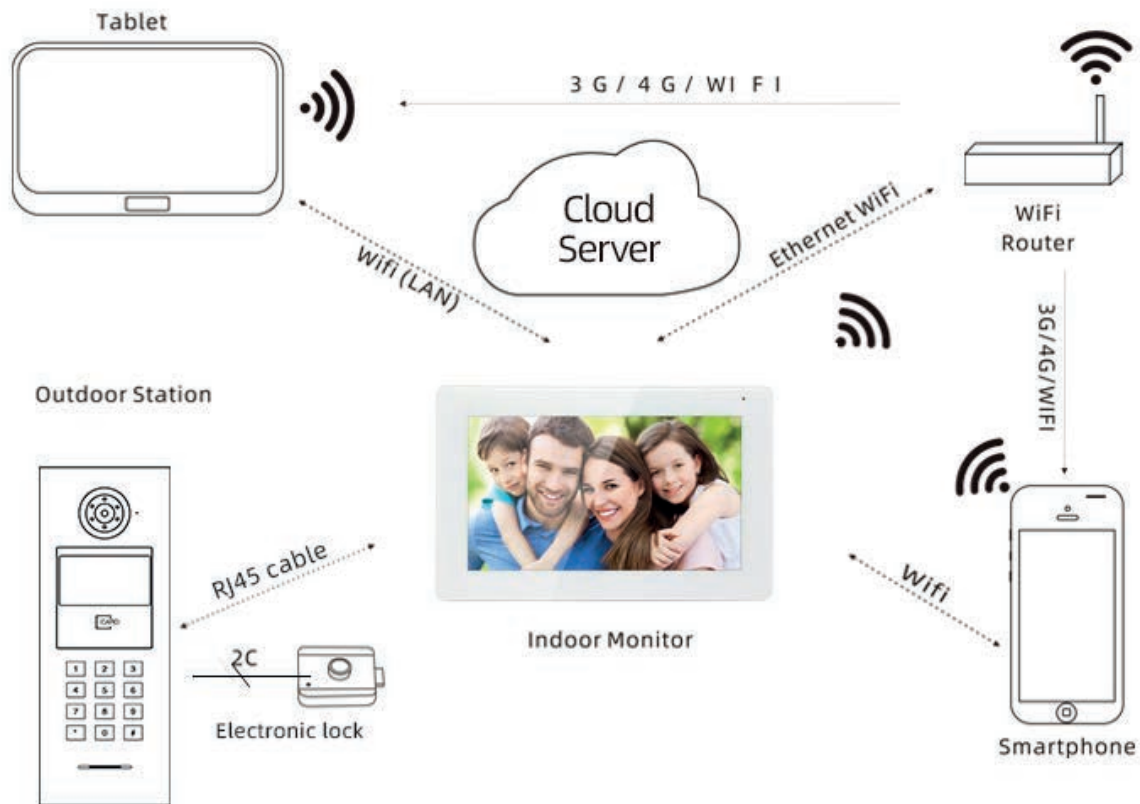

SPECIFICATIONS	IPVIEW
ELECTRICAL CHARACTERISTICS	
Power	DC 12V or PoE
Consumption	Max 200mA
Relay	1no NO/NC programmable and handset has 1no NO/NC
Connection	Class E (CAT 6) U/UTP
Temperature	Operating -30°C to 60°C
FEATURES	
Colour camera	HD Camera, angle of view: 120°
Colour LCD screen dimensions	100mm x 55mm
Input	8 inputs to each handsets
Proximity reader	Anti-vandal, illuminated cloud based integral proximity reader
Capacity	999 names/flats per core/block, 99 cores/blocks
Advanced features	Flexible and scalable; equipment is easily interchangeable. Trades facilities, buttons and/or keypad code(s), via integral time clock.
Lift Control integration module – optional	Visitor floor specific lift control module
Concierge enabled	Via concierge handset option to release/ open all floors, view events & alarms, communicate with flats
Advanced handset features	User configuration, Events & recordings, security monitoring, calls & Cloud connectivity, system configuration,
Smartphone App	TuyaSmart app on Google play & App Store
Mobile access	Open door via app on smart devices from anywhere, at any time
Programming	Access control programmed via www.baticonnect.com available 24/7/365 in real-time
DDA compliance	Voice output messages, visual LEDs and display messages

IPVIEW Smart Receiver – ZEUS


See, talk and open the door from anywhere!

Full IP / PoE connection

IPVIEW IP Video Door Entry & Access Control System



24/7/365 REAL-TIME
CLOUD MANAGEMENT
baticonnect.com

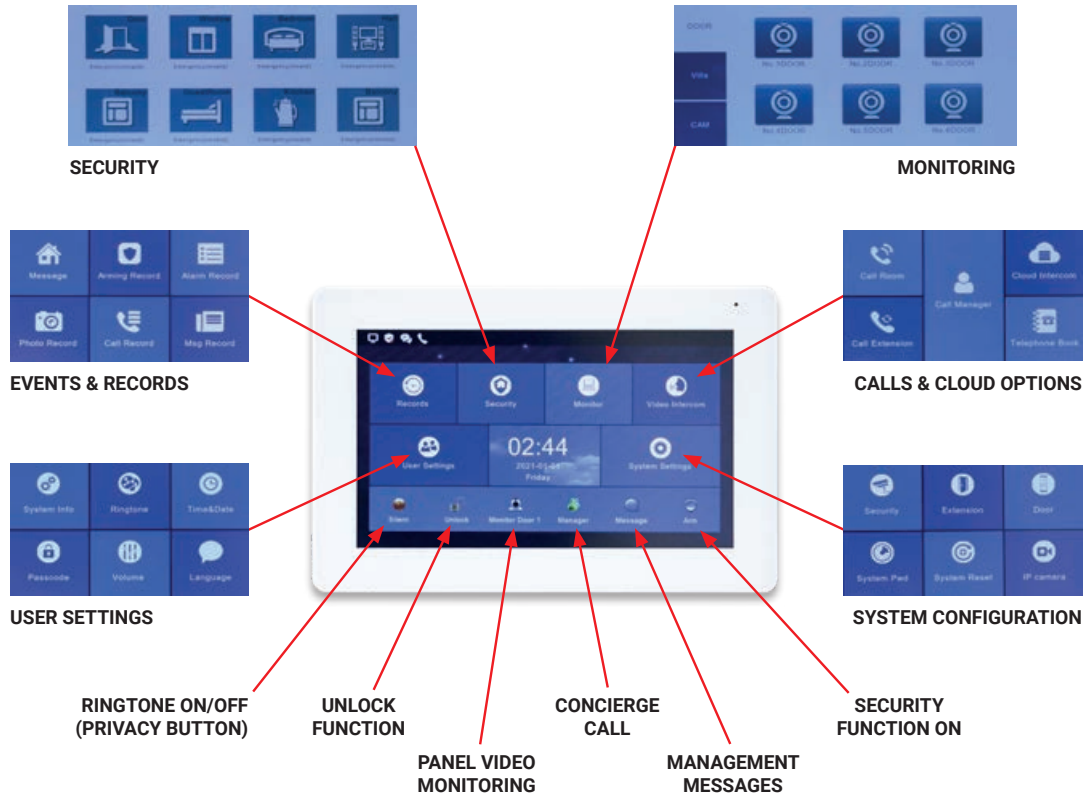

SPECIFICATIONS		IPVIEW SMART RECEIVER – ZEUS
MECHANICAL CHARACTERISTICS		
Facia dimensions		120mmH x 190mmW x 28mmD
Colour Screen		7" colour screen display
Colour		White (black to special order)
ELECTRICAL CHARACTERISTICS		
Power		DC 12V/2A, PoE
Consumption		<5W/<350mA
Connection		CAT 6
Temperature		Operating: -20 to +70

+44 (0)1442 211848
estimating@nacd.co.uk

www.nacd.co.uk
f in nacdltd

Unit 8, Heron Business Park, Eastman Way,
Hemel Hempstead, Hertfordshire, HP2 7FW

