

PX10-F Externally Rated Anti-Vandal Proximity Reader, Flush Flanged

Q N° 430RS

PX10-F



BATICONNECT® CLOUD MIFARE Technology Proximity Reader (LPMRS-XNA + 1F)



24/7/365 REAL-TIME
CLOUD MANAGEMENT
baticonnect.com



Dimensions (mm): Backbox 130H x 113W x 80D
Facia 160H X 143W



ANTI-CLONE GUARANTEE

ONLY FOR NORALSY BATICONNECT & IPGUARD SYSTEMS

NOTES

Flush flanged BS316 grade s.steel anti-vandal externally rated proximity reader LPMRS-XNA + 1F.

Operate in conjunction with EVE196-X3-RS door control units, BATICONNECT® CLOUD.



PX10-S Externally Rated Anti-Vandal Proximity Reader, Surface

Q N° 431RS

PX10-S



BATICONNECT® CLOUD MIFARE Technology Proximity Reader (LPMRS-XNA + 1S)

Dimensions (mm): 120H x 104W x 73D



24/7/365 REAL-TIME
CLOUD MANAGEMENT
baticonnect.com



ANTI-CLONE GUARANTEE

ONLY FOR NORALSY BATICONNECT & IPGUARD SYSTEMS

NOTES

Surface BS316 grade s.steel anti-vandal externally rated proximity reader LPMRS-XNA + 1S.

Operate in conjunction with EVE196-X3-RS door control units, BATICONNECT® Cloud.



PX10-HS Externally Rated Anti-Vandal Proximity Reader, Hooded Surface

Q N° 432RS

PX10-HS



BATICONNECT® CLOUD MIFARE Technology Proximity Reader (LPMRS-XNA + 1HS)

Hooded surface (HS) housings are designed for mounting onto the NACD range of car, lorry, van and, car/lorry dual height posts.

Dimensions (mm): 158H x 108W x 73DB x 100DT



24/7/365 REAL-TIME
CLOUD MANAGEMENT
baticonnect.com



ANTI-CLONE GUARANTEE

ONLY FOR NORALSY BATICONNECT & IPGUARD SYSTEMS

NOTES

Hooded surface BS316 grade s.steel anti-vandal externally rated proximity reader LPMRS-XNA + 1HS.


Operate in conjunction with EVE196-X3-RS door control units, BATICONNECT® Cloud.



POSTC + PX10-HS Post-Mounted Anti-Vandal Proximity Reader

Q N° 434RS

POSTC + PX10-HS

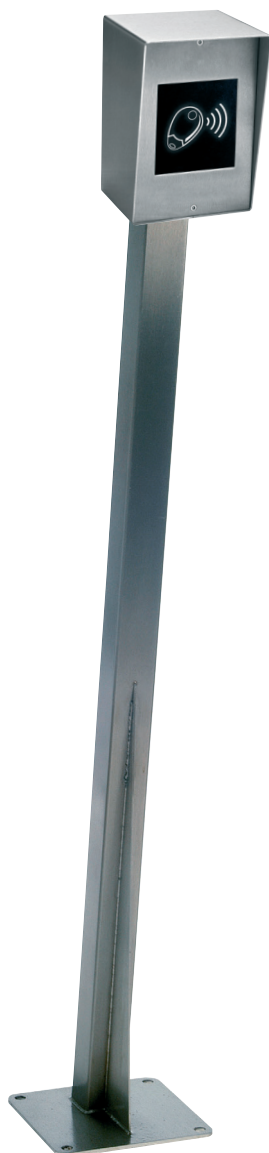

PX10-HS

BATICONNECT® CLOUD MIFARE
Technology Proximity Reader.

Hooded surface BS316 grade
s.steel anti-vandal externally-rated
proximity reader.

Hooded surface (HS) housings
are designed for mounting onto
the NACD range of car, lorry, van
and, car/lorry dual height posts.

PX10-HS dimensions (mm): 158H x 108W x 73DB x 100DT
POSTC, see overleaf.



24/7/365 REAL-TIME
CLOUD MANAGEMENT
baticonnect.com



ANTI-CLONE GUARANTEE

ONLY FOR NORALSY BATICONNECT & IPGUARD SYSTEMS

NOTES

POSTC + PX10-HS PROXIMITY READER

Hooded surface BS316 grade s.steel anti-vandal
externally rated proximity reader.

Operate in conjunction with EVE196-X3-RS door
control units, BATICONNECT® Cloud.




POSTC, Car Height

Q N° 10000





Fixing plate for HS housing

FIT VERTICALLY



VISITOR PANELS / PROXIMITY
READERS / EXIT DEVICES
ARE DESIGNED TO BE FITTED
VERTICALLY IE. UPRIGHT
NOT AT AN ANGLE!

NACD EXCLUDE ALL
RESPONSIBILITY FOR DAMAGE
TO PANEL ELECTRONICS CAUSED
BY CONDENSATION WITHIN 3RD
PARTY POSTS. ALSO, IF PANEL
AGAINST ADVICE FITTED AT AN
ANGLE, IT MUST BE UNDER COVER
SO PROTECTED FROM DIRECT
RAIN / SNOW / SUN.

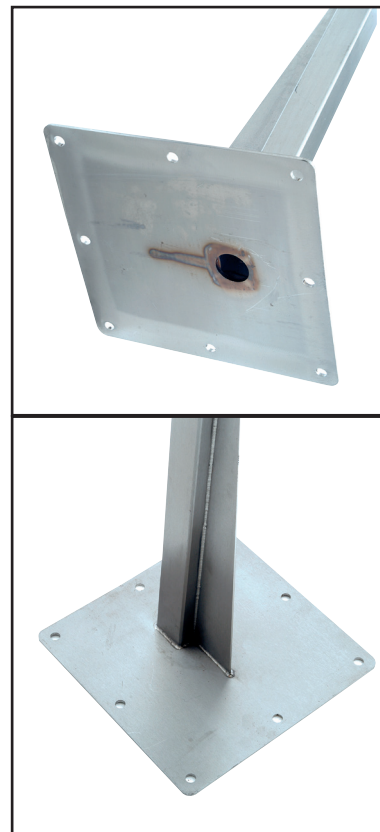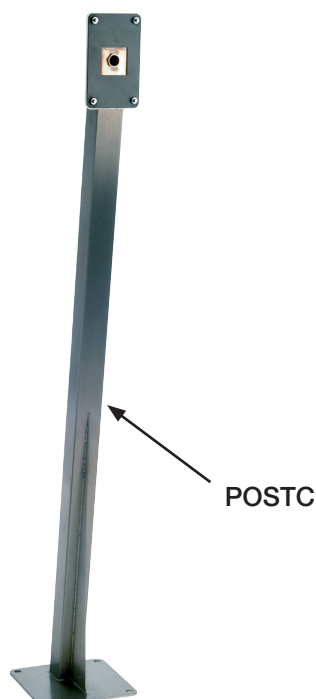

Dimensions code: POSTC

NOTES

POSTC

Dimensions of Reinforced Base:	190mm x 190mm
Hole centres for rawl bolts:	160mm x 160mm
Hole diameter:	13mm (designed for 12mm rawl bolt)
No. of bolt holes:	4no
Hole diameter in base for cable:	30mm
Upright box section of POSTC:	50mm x 3mm wall
Height from base to centre of mounting plate:	1.15 metres
Material	BS304 grade stainless steel